BeBright

Brighten the experience

OLED.
Display

OLED

Multiple styles of OLED-T covering multiple fields
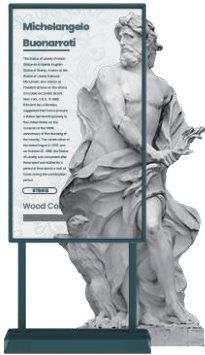
RK-O55-LTP6-AI

RK-O55-LTP6-ART

RK-O55-LTPA

RK-O30-LTP6-K

RK-O55-PTG6-1X2

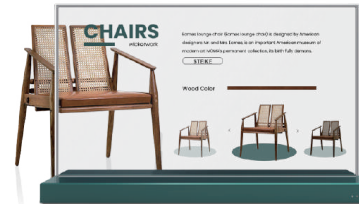

RK-O55-STP6

RK-O55-LTP6-R

RK-O55-PTG6-2X2

* For more product models, please contact the CEOLED Display sales team.

RK-O30-ZTP6

RK-O55-QTP6

RK-O30-QTP6

RK-O55-ZTP2-Y

RK-O55-WTG2

OD55-TGS5

RK-O48-LTGA

RK-O30-STP6

Showcase

Showroom

![BeBright - Brighten the experience]

	Enterprise Exhibition	**Retail**	**Museum**	**Rail Transit**	**At Home**
OLED -T value	The openness of the office environment Touchable interaction, providing more information	Spatial openness Catch consumers' attention Enhance brand image	Innovative Digital Experience Deliver Information	The screen provides effective content Open a new chapter of future travel	Reflecting a high-end decorative effect As a part of decoration, the smart wall can save space.
Usage Scenario	Office Conference room Exhibition hall	Department store Shopping center Retail store \ 4S store	Museums Art Galleries	Subway Car Window Metro Automatic Door	Transparent display Smart home communication terminal

Enterprise Exhibition

Improve the openness of the office space,enhance the product display effect and corpoate image.

Retail

Maintain a sense of open space，Attract consumers' attention
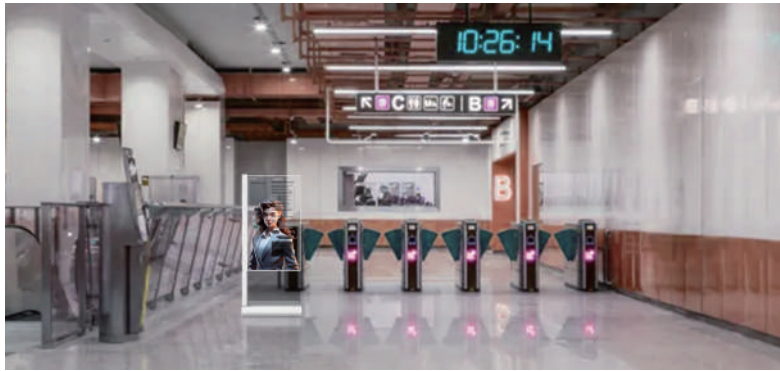Enhance brand image through high-end decoration

Museum

Improve the audience's participation and sense of experience, adding technological content and attractiveness to the museum.
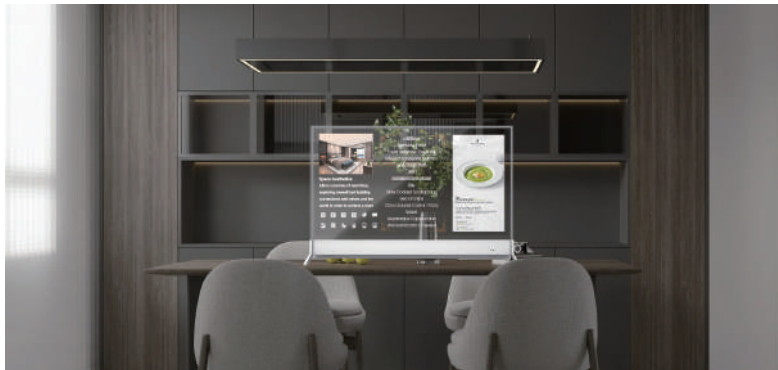
🚆 Rail Transit

Transparent car window screen, opening a new chapter in travel

At Home

OLED transparent screens will decorate the home with a sense of luxury and enhance the value of the building.

CEOLED Display

RK-O55-LTP6-AI
55-inch AI Touch Transparent OLED Totem

▶ *55" Size*

▶ *Full HD Resolution (1920 x 1080)*

▶ *40% light transmissivity*

▶ *Dual-Column Stand Design for Stability and Style
Ultra-Narrow Bezel for Seamless Visual Experience*

Product Highlights

The "55-inch AI Touch Transparent OLED Totem" (Model: RK-O55-LTP6-AI) is a cutting-edge display solution that combines the latest in transparent OLED technology with artificial intelligence, offering a truly interactive and futuristic experience. This display is designed to captivate users with its intelligent interaction capabilities and sleek aesthetic, making it a perfect fit for high-end retail spaces, interactive exhibitions, and smart office environments. Let's delve into the detailed selling points that make this product stand out.
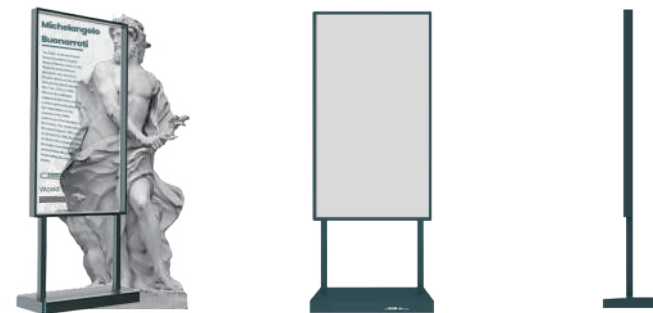
Specifications

Model	RK-O55-LTP6-AI
Size	55"
Display Resolution	Full HD (1920 x 1080)
Peak White Brightness	400 cd/m²
Video Inputs	HDMI x1, Display Port x1
Control	Capacitive touch, RS-232, USB, LAN
Transmissivity	40%
Viewing Angle(typical)	178° H,V
Contrast Ratio(typical)	>100k:1
Response Time(typical)	<1 ms
Palette	1.073 billion colors (10-bit)
Product size	724 * 1809 * 60 (mm)
Weight(package)	45kg/66 kg 99 lbs/ 145.2 lbs
Power Requirements	100 to 240V AC
Power Consumption	<280W

CEOLED Display

RK-O55-LTP6-ART
55-Inch Transparent OLED Art Display

▶ *55" Size*

▶ *Full HD Resolution (1920 x 1080)*

▶ *40% light transmissivity*

▶ *Exclusive for High-End Art Exhibitions*

▶ *Floor standing*

Product Highlights

Exclusive for High-End Art Exhibitions: The RK-O55-LTP6-ART is designed with the elite art world in mind. Its superior image quality and unique display capabilities make it an ideal choice for showcasing artworks. The vivid clarity and true-to-life color representation of this display ensure that each piece of art is presented in its full glory, captivating the viewers and elevating the overall Product Highlights exhibition experience.

Specifications

Model	RK-O55-LTP6-ART
Size	55"
Display Resolution	Full HD (1920 x 1080)
Peak White Brightness	400 cd/m²
Video Inputs	HDMI x1, Display Port x1
Control	Capacitive touch, RS-232, USB, LAN
Transmissivity	40%
Viewing Angle(typical)	178° H,V
Contrast Ratio(typical)	>100k:1
Response Time(typical)	<1 ms
Palette	1.073 billion colors (10-bit)
Product size	1781*772*361(mm)
Weight(package)	71/90 kg 156.2lbs/198lbs
Power Requirements	100 to 240V AC
Power Consumption	<280W

CEOLED Display

RK-O55-LTPA
T-OLED Navigator

- ▸ *55" Size(FHD)*
- ▸ *8-Hour Battery Life*
- ▸ *43% light transmissivity*
- ▸ *600 cd/m² High-Brightness OLED Screen*
- ▸ *Automatic obstacle avoidance*
- ▸ *Route planning*

Product Highlights

1. "Smart Robot Integrated with Transparent OLED Technology" - Combines advanced robotics with a transparent OLED display, offering an innovative visual experience.
2. "8-Hour Battery Life" - Ensures prolonged operational capability with an extended 8-hour battery life, supporting continuous use throughout the day.
3. "Automatic Return-to-Base Charging" - Features intelligent self-navigation back to the charging station, ensuring the device is always ready for use.

Specifications

Model	RK-O55-LTPA
Size	55"
Display Resolution	Full HD (1920 x 1080)
Peak White Brightness	600 cd/m²
Video Inputs	HDMI x1, Display Port x1
Control	Capacitive touch, RS-232, USB, LAN
Transmissivity	43%
Viewing Angle(typical)	178° H,V
Contrast Ratio(typical)	>100k:1
Response Time(typical)	<1 ms
Product size	1775 * 770 * 572 (mm)
Battery Life	6-8hours
Weight(package)	113.5kg (249.7 lbs)
Power Requirements	100 to 240V AC
Power Consumption	<260W

CEOLED Display

RK-O30-LTP6-K
30inch Touch Transparent OLED Kiosk

- ▶ *30" Size*
- ▶ *Resolution (1366 x 768)*
- ▶ *43% light transmissivity*
- ▶ *EU Design Patent Certified from March 2024*
- ▶ *G+F+F*

Product Highlights

1.Sleek Curved All-Glass Design - The product features an elegant, all-glass body with a smooth, curved design, offering a modern and sophisticated aesthetic.

2.EU Design Patent Certified- The product's unique appearance and design are protected under an EU design patent, ensuring its exclusivity and Product Highlights innovation in the market.

Specifications

Model	RK-O30-LTP6-K
Size	30"
Display Resolution	1366 x 768
Peak White Brightness	600 cd/m²
Video Inputs	HDMI x1, Display Port x1
Control	Capacitive touch, RS-232, USB, LAN
Transmissivity	43%
Viewing Angle(typical)	178° H,V
Contrast Ratio(typical)	>100k:1
Response Time(typical)	<1 ms
Palette	1.073 billion colors (10-bit)
Product size	604 * 1709 (mm)
Weight(package)	35 KG/55KG 77 lbs/ 121 lbs
Power Requirements	100 to 240V AC
Power Consumption	<100W

CEOLED Display

RK-O55-PTG6-1X2
55inch 1X2 Video wall OLED

▶ *2 x 55" Size*

▶ *Full HD Resolution (1920 x 2160)*

▶ *40% light transmissivity*

▶ *Sleek Aluminum Alloy Frame Design*

Product Highlights

1x2 55-Inch OLED Video Wall Setup: The RK-O55-PTG6-1X2 features a unique 1x2 setup, consisting of two 55-inch transparent OLED panels seamlessly combined to create a arger display area. This configuration not only maximizes the use of space but also enhances the visual continuity across the screens, creating a singular, expansive canvas for displaying content.

Specifications

Model	RK-O55-PTG6-1X2
Size	2 x 55"
Display Resolution	1920 x 2160
Peak White Brightness	400 cd/m²
Video Inputs	HDMI x1, Display Port x1
Control	Capacitive touch, RS-232, USB, LAN
Transmissivity	40%
Viewing Angle(typical)	178° H,V
Contrast Ratio(typical)	>100k:1
Response Time(typical)	<1 ms
Palette	1.073 billion colors (10-bit)
Product size	120% of NTSC
Weight(package)	
Power Requirements	100 to 240V AC
Power Consumption	<600W

CEOLED Display

RK-O55-STP6
55-Inch Premium Auto-Lift OLED Display

- ▶ *55" Size*
- ▶ *Full HD Resolution (1920 x 1080)*
- ▶ *40% light transmissivity*
- ▶ *Automated Lifting Mechanism*

Product Highlights

Automated Lifting Mechanism: At the heart of the RK-O55-STP6's design is its automated lifting mechanism, which allows the screen to be smoothly raised or lowered with the touch of a button. This feature not only adds a dramatic flair to presentations and displays but also offers practical benefits in terms of space management and device protection. When not in use, the screen can be retracted into its base, minimizing its physical footprint and safeguarding the screen from potential damage.

Specifications

Model	RK-O55-STP6
Size	55″
Display Resolution	Full HD (1920 x 1080)
Peak White Brightness	400 cd/m²
Video Inputs	HDMI x1, Display Port x1
Control	Capacitive touch, RS-232, USB, LAN
Transmissivity	40%
Viewing Angle(typical)	178° H,V
Contrast Ratio(typical)	>100k:1
Response Time(typical)	<1 ms
Palette	1.073 billion colors (10-bit)
Product size	1438*330*990(mm)
Weight(package)	81.5 kg (179.3 lbs)
Power Requirements	100 to 240V AC
Power Consumption	<600W

CEOLED Display

RK-O55-LTP6-R

55-Inch Transparent OLED Display for Real Estate Showcasing

- ▸ *55" Size*
- ▸ *Full HD Resolution (1920 x 1080)*
- ▸ *40% light transmissivity*
- ▸ *Tailored for Real Estate Scale Models*

Product Highlights

The "55-Inch Transparent OLED Display for Real Estate Showcasing" (Model: RK-O55-LTP6-R) is a groundbreaking solution designed specifically for the dynamic needs of the real estate industry. Its innovative features enhance the presentation of scale models and architectural designs, offering a captivating and interactive way to visualize future projects. This product integrates cutting-edge technology with a sophisticated design to create an immersive viewing experience for potential clients.Product Highlights and investors.

Specifications

Model	RK-O55-LTP6-R
Size	55"
Display Resolution	Full HD (1920 x 1080)
Peak White Brightness	400 cd/m²
Video Inputs	HDMI x1, Display Port x1
Control	Capacitive touch, RS-232, USB, LAN
Transmissivity	40%
Viewing Angle(typical)	178° H,V
Contrast Ratio(typical)	>100k:1
Response Time(typical)	<1 ms
Palette	1.073 billion colors (10-bit)
Product size	2002*810*810(mm)
Weight(package)	81.5 kg (179.3 lbs)
Power Requirements	100 to 240V AC
Power Consumption	<600W

CEOLED Display

RK-O55-PTG6-2X2
55inch 2X2 Video wall OLED

- ▶ *4 x 55" Size*
- ▶ *Full HD Resolution (3840 x 2160)*
- ▶ *40% light transmissivity*
- ▶ *Ultra-Narrow Bezel Design*

Product Highlights

55-Inch 2x2 Seamless Transparent OLED Video Wall:Ultra-Clear, Space-Saving Design (Model: RK-O55-PTG6-2X2) stands at the forefront of display technology, embodying the perfect blend of aesthetic minimalism and high-performance functionality. Designed to captivate and impress, this video wall is an ideal solution for premium retail locations, corporate headquarters, and any space where visual communication is paramount.

Specifications

Model	RK-O55-PTG6-2X2
Size	4 x 55"
Display Resolution	UHD (3840 x 2160)
Peak White Brightness	400 cd/m²
Video Inputs	HDMI x1, Display Port x1
Control	Capacitive touch, RS-232, USB, LAN
Transmissivity	40%
Viewing Angle(typical)	178° H,V
Contrast Ratio(typical)	>100k:1
Response Time(typical)	<1 ms
Palette	1.073 billion colors (10-bit)
Product size	120% of NTSC
Weight(package)	
Power Requirements	100 to 240V AC
Power Consumption	<300W

CEOLED Display

RK-O30-ZTP6
30 Inch Transparent Touchscreen Desktop Display

▸ *30" Size*

▸ *Resolution (1366 x 768)*

▸ *43% light transmissivity*

▸ *G+F+F*

Product Highlights

The "30 Inch Transparent Touchscreen Desktop Display" (Model: RK-O30-ZTP6) is a revolutionary product that combines advanced interactive technology with a compact, transparent design. Aimed at providing an engaging user experience while accommodating space-conscious setups, this display represents a leap forward in desktop display technology. Let's explore the unique features that make the RK-O30-ZTP6 an innovative solution for both professional and personal environments
Product Highlights.

Specifications

Model	RK-O30-ZTP6
Size	30"
Display Resolution	1366 x 768
Peak White Brightness	600 cd/m²
Video Inputs	HDMI x1, Display Port x1
Control	Capacitive touch, RS-232, USB, LAN
Transmissivity	43%
Viewing Angle(typical)	178° H,V
Contrast Ratio(typical)	>100k:1
Response Time(typical)	<1 ms
Palette	1.073 billion colors (10-bit)
Product size	686.1 * 533.8 * 44 (mm)
Weight(package)	6kg/12KG 8.8lbs/26.4lbs
Power Requirements	100 to 240V AC
Power Consumption	<80W

CEOLED Display

RK-O55-QTP6
55inch L Open Cell Transparent
OLED Display

▸ *55" Size*

▸ *Full HD Resolution (1920 x 1080)*

▸ *40% light transmissivity*

▸ *Open Cell Design*

Product Highlights

The "55-inch L Open Cell Transparent OLED Display" (Model: RK-O55-QTP6-L) is a pinnacle of display innovation, designed to integrate seamlessly into modern environments while providing an unparalleled viewing experience. This display combines the best of OLED technology with a transparent design, offering a unique blend of visual quality and aesthetic appeal. Here are the detailed selling points of this sophisticated product.Product Highlights.

Specifications

| Model	RK-O55-QTP6
Size	55"
Display Resolution	Full HD (1920 x 1080)
Peak White Brightness	400 cd/m²
Video Inputs	HDMI x1, Display Port x1
Control	Capacitive touch, RS-232, USB, LAN
Transmissivity	40%
Viewing Angle(typical)	178° H,V
Contrast Ratio(typical)	>100k:1
Response Time(typical)	<1 ms
Palette	1.073 billion colors (10-bit)
Product size	1225.5*782.4*220(mm)
Weight(package)	34/50KG 74.8 lbs/ 110 lbs
Power Requirements	100 to 240V AC
Power Consumption	<200W

CEOLED Display

RK-O30-QTP6
30-Inch Transparent OLED Video Wall Display

▸ *30" Size*

▸ *Resolution (1366 x 768)*

▸ *43% light transmissivity*

▸ *Video wall design*
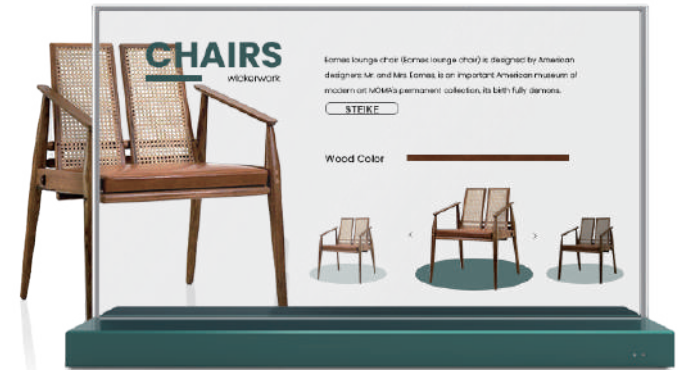
Product Highlights

1. "30-Inch Video Wall with Flexible N x 1 Configuration" - This highlights the product's adaptable design, allowing for versatile installation setups to suit different space requirements and visual impact goals.

2. "Versatile Design Applications" - Emphasizes the product's flexibility in design, making it suitable for a wide range of applications and environments, enhancing aesthetic appeal and functionality.

Specifications

Model	RK-O30-QTP6
Size	30"
Display Resolution	1366 x 768
Peak White Brightness	600 cd/m²
Video Inputs	HDMI x1, Display Port x1
Control	Capacitive touch, RS-232, USB, LAN
Transmissivity	43%
Viewing Angle(typical)	178° H,V
Contrast Ratio(typical)	>100k:1
Response Time(typical)	<1 ms
Palette	1.073 billion colors (10-bit)
Product size	681*424*147(mm)
Weight(package)	6kg/15KG 8.8lbs/33 lbs
Power Requirements	100 to 240V AC
Power Consumption	<80W

CEOLED Display

RK-O55-ZTP2-Y
55-Inch Transparent OLED Display with Y-Type Desktop Stand

- ▶ *55" Size*
- ▶ *Full HD Resolution (1920 x 1080)*
- ▶ *40% light transmissivity*
- ▶ *Y-Type Desktop stand*

Product Highlights

The "55-Inch Transparent OLED Display with Y-Type Desktop Stand" (Model: RK-O55-ZTP2-Y) represents a significant advancement in display technology, blending aesthetic appeal with cutting-edge functionality. Designed to captivate and inspire, this display is an exemplary choice for those looking to elevate the ambiance of their modern interiors and .Product Highlights workspaces.

Specifications

Model	RK-O55-ZTP2-Y
Size	55"
Display Resolution	Full HD (1920 x 1080)
Peak White Brightness	400 cd/m²
Video Inputs	HDMI x1, Display Port x1
Control	Capacitive touch, RS-232, USB, LAN
Transmissivity	40%
Viewing Angle(typical)	178° H,V
Contrast Ratio(typical)	>100k:1
Response Time(typical)	<1 ms
Palette	1.073 billion colors (10-bit)
Product size	1237.5 * 826.4 * 214 (mm)
Weight(package)	34kg/50kg 74.8lbs / 110 lbs
Power Requirements	100 to 240V AC
Power Consumption	<180W

CEOLED Display

RK-O55-WTG2
55-Inch Transparent OLED Display for Museums

▸ *55" Size*

▸ *Full HD Resolution (1920 x 1080)*

▸ *43% light transmissivity*

▸ *High Brightness 600 cd/m² OLED Panel*

Product Highlights

Premium Artifact Display Cabinet: The RK-O55-WTG2 is designed not just as a display but as a premium artifact display cabinet that redefines the museum experience. This integration of a 55-inch transparent OLED display into a cabinet allows artifacts to be viewed in unprecedented clarity and detail. The crystal-clear visibility afforded by the OLED technology means that every nuance of an artifact is visible, from the subtle textures of ancient pottery to the fine brushstrokes on historic.Product Highlights manuscripts.

Specifications

Model	RK-O55-WTG2
Size	55"
Display Resolution	Full HD (1920 x 1080)
Peak White Brightness	600 cd/m²
Video Inputs	HDMI x1, Display Port x1
Control	Capacitive touch, RS-232, USB, LAN
Transmissivity	43%
Viewing Angle(typical)	178° H,V
Contrast Ratio(typical)	>100k:1
Response Time(typical)	<1 ms
Palette	1.073 billion colors (10-bit)
Product size	2002*810*810(mm)
Weight(package)	
Power Requirements	100 to 240V AC
Power Consumption	<600W

CEOLED Display

RK-O55-DRS6
### 55in ceiling mount curvable OLED

▶ *55" Size*

▶ *4K Resolution (3840 x 2160)*

▶ *Curvable OLED (non-transparency)*

▶ *Ceiling mount or tiled installation*
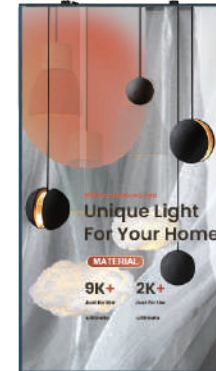
Product Highlights

Unlike traditional flat screens, the RK-O55-DRS6 boasts a gently curved design that mimics the natural curvature of the human eye. This ingenious feature ensures every point on the screen is at an equal distance from your eyes, reducing eye strain and creating a truly panoramic viewing experience. Whether you're watching a fast-paced action movie or engrossed in a detailed documentary, the curve ensures a uniform and captivating view from edge to edge.
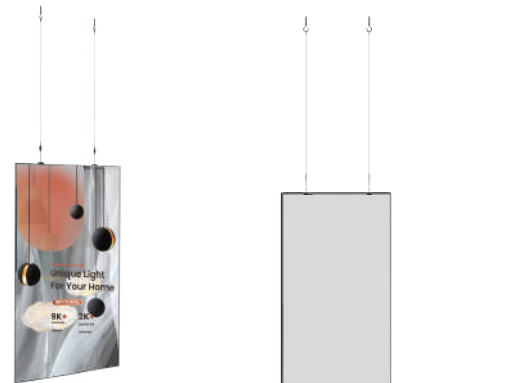
Specifications

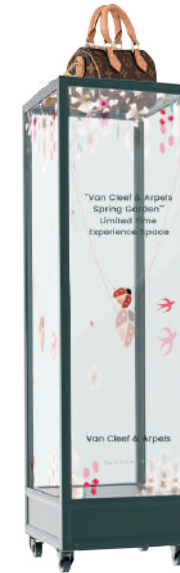| Model	RK-O55-DRS6
Size	55"
Display Resolution	4K (3840 x 2160)
Peak White Brightness	600 cd/m²
Video Inputs	HDMI x1, Display Port x1
Control	RS-232
Transmissivity	Non
Viewing Angle(typical)	178° H,V
Contrast Ratio(typical)	>100k:1
Response Time(typical)	<1 ms
Palette	1.073 billion colors (10-bit)
Product size	120% of NTSC
Weight(package)	8.75lbs (3.5kg)
Power Requirements	100 to 240V AC
Power Consumption	<180W

CEOLED Display

RK-O48-LTGA
48 inch Streched OLED Cabinet

- ▸ *48" Size*
- ▸ *Full HD Resolution (540 x 1920)*
- ▸ *40% light transmissivity*
- ▸ *Floor standing or tiled installation*

Product Highlights

48-Inch Stretched OLED Cabinet featuring a resolution of 540 x 1920, tailored for elongated display solutions in retail and public spaces. Offers superior image quality and a sleek design, ideal for engaging advertisements and information dissemination.

Specifications

Model	RK-O48-LTGA
Size	48"
Display Resolution	540 x 1920
Peak White Brightness	400 cd/m²
Video Inputs	HDMI x1, Display Port x1
Control	Capacitive touch, RS-232, USB, LAN
Transmissivity	40%
Viewing Angle(typical)	178° H,V
Contrast Ratio(typical)	>100k:1
Response Time(typical)	<1 ms
Palette	1.073 billion colors (10-bit)
Product size	120% of NTSC
Weight(package)	97.9lbs (44.5kg)
Power Requirements	100 to 240V AC
Power Consumption	<180W

CEOLED Display

RK-O30-STP6
30-Inch Premium Auto-Lift OLED Display

- ▶ *30" Size*
- ▶ *Resolution 1366 x 768*
- ▶ *43% light transmissivity*
- ▶ *Floor standing or integrated*

Product Highlights

30-Inch Premium Auto-Lift OLED Display with a resolution of 1366 x 768, designed for exceptional clarity and vibrant visuals. Perfect for dynamic commercial pres.

Specifications

Model	RK-O30-STP6
Size	30"
Display Resolution	1366 x 768
Peak White Brightness	600 cd/m²
Video Inputs	HDMI x1, Display Port x1
Control	Capacitive touch, RS-232, USB, LAN
Transmissivity	43%
Viewing Angle(typical)	178° H,V
Contrast Ratio(typical)	>100k:1
Response Time(typical)	<1 ms
Palette	1.073 billion colors (10-bit)
Product size	120% of NTSC
Weight(package)	55.0lbs (34.0kg)
Power Requirements	100 to 240V AC
Power Consumption	<100W

BeBright

Brighten the experience